

Sparrow


Diode pumped passively Q-switched solid state laser

FEATURES

- Small footprint
- ns pulse width
- Output energy adjustable
- External and Internal Trigger
- Free Beam or Fiber Coupling
- Single Pulse and Burst Mode Operation
- Real-time pulse monitoring output
- RS-232 and USB interface

APPLICATIONS

- Light Induced Breakdown Spectroscopy (LIBS)
- Light Detection And Ranging (LIDAR)
- Laser ablation / micromachining
- Time-of-Flight Spectroscopy (TOFS)
- Time Resolved Spectroscopy (TRS)
- Raman spectroscopy

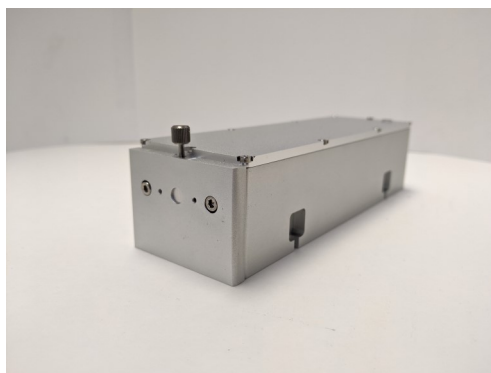


Sparrow is a diode pumped, water-free, passively Q-switched laser based on a microchip with multiple frequency conversion stages. Sparrow is optimized to produce TEM₀₀, low divergence, ~1 nanosecond pulses in a compact and robust package.

The Sparrow system are available in different models, the Sparrow-1064, Sparrow-532 and Sparrow-355, which output 1064nm, 532nm and 355nm respectively through a collimated free beam or an optional multimode fiber. The fiber core diameter is available in 200µm or 400µm sizes.

The Sparrow is flexible and designed to be used for a variety of applications. All Sparrow models feature internal energy attenuation, real-time power readings, built-in burst mode operation, and a real-time pulse trigger output.

	Sparrow-1064	Sparrow-532	Sparrow-355
Wavelength (nm)	1064	532	355
Pulse Width (FWHM)	~1 ns	~1 ns	~1 ns
Pulse Energy	>180 µJ @1kHz	>80 µJ @1kHz	>20 µJ @1kHz
Pulse Repetition Rate	Up to 5.0 kHz	Up to 5.0 kHz	Up to 5.0 kHz
Spatial Mode	TEM ₀₀	TEM ₀₀	TEM ₀₀
Pulse Energy Instability	<2% RMS	<3% RMS	<3% RMS
Beam Divergence	<10 mrad	<10 mrad	<10 mrad
Beam Size (1/e ²)	~1 mm	~1 mm	~1 mm
Polarization	Vertical	Vertical	Vertical

Laser Head Dimensions (mm):

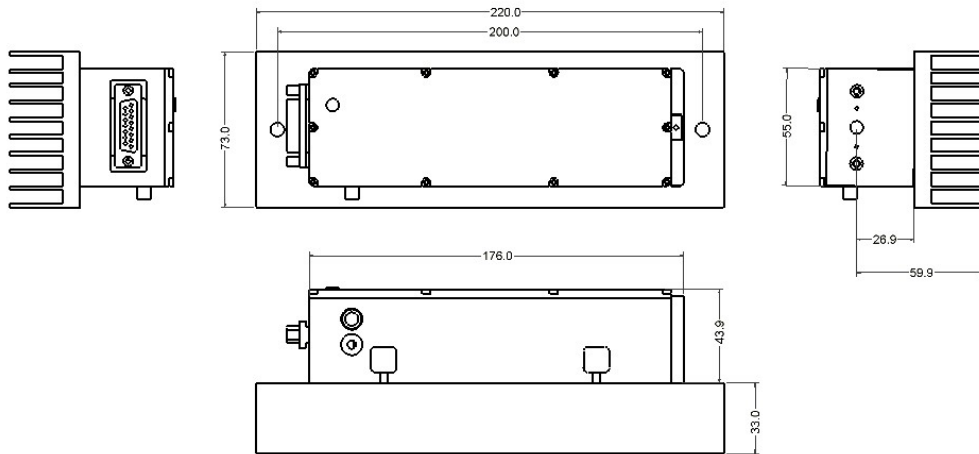

Controller Dimensions (mm):

