

Lucia

Diode-pumped, Q-Switched Nd:YLF Green



FEATURES

- Long-life diode module
- Rugged design for vibration and shock resistance to improve reliability
- Average output up to 45 W
- Smooth beam profile at focus, $M^2 < 16$
- Best pulse stability for scientific research, $< 0.5\%$
- Ideal for Ti: Sapphire pumping


APPLICATIONS

- Ultrafast pumping
- PIV
- Material processing
- Micromachining
- Laser ultrasonics


The Lucia series are diode-pumped, Q-switched second harmonic Nd:YLF lasers. They feature field-proven long-life diode module and no DI water requirement for water chiller. The rugged enclosure design and optimum cavity design result in excellent output stability as well as increased reliability for long-term operation. The Lucia series are optimized for ultrafast Ti: Sapphire amplifier pumping, such as UpTek Solutions' Phidia ultrafast series lasers.

Lucia is pumped by a high-end long-life laser diode module. The standard Lucia has enough maximum power to compensate for power drop as the diode module ages. Lucia works with an all-digital controller, Phi-10, to provide laser protections against low/high trigger repetition rate, insufficient water cooling and so on. The Lucia provides optimum solutions for scientific as well as industrial customers for applications, such as ultrafast amplifier pumping, PIV, material processing, micromachining, etc.

	Lucia-30-M	Lucia-45-M	Lucia-60-M
Pulse Energy/Power	>20 mJ@1KHz	>30 mJ@1KHz	>38 mJ@1KHz
Repetition Rate	1-10 KHz	1-10 KHz	1-10 KHz
Wavelength	527 nm	527 nm	527 nm
Pulse Width	<200 ns	<300 ns	<300 ns
Spatial Mode	M ² <16	M ² <16	M ² <16
Beam Size (1/e ²)	~ 3 mm	~ 3 mm	~3 mm
Energy Stability	<0.5 % RMS	<0.5 % RMS	<0.5 % RMS
Polarization	Linear, Horizontal	Linear, Horizontal	Linear, Horizontal

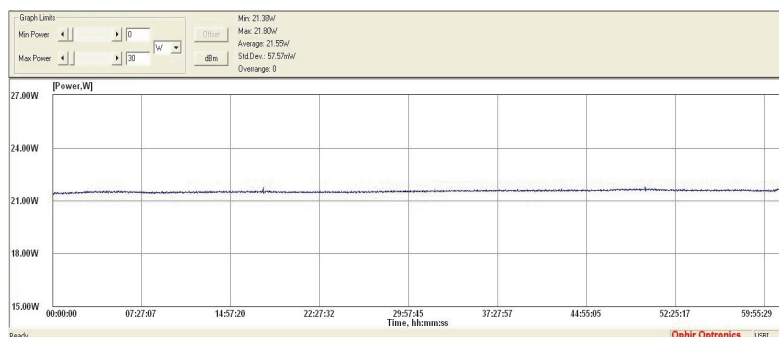

Lucia-30-M Output Power Stability Measurement (60 hrs)

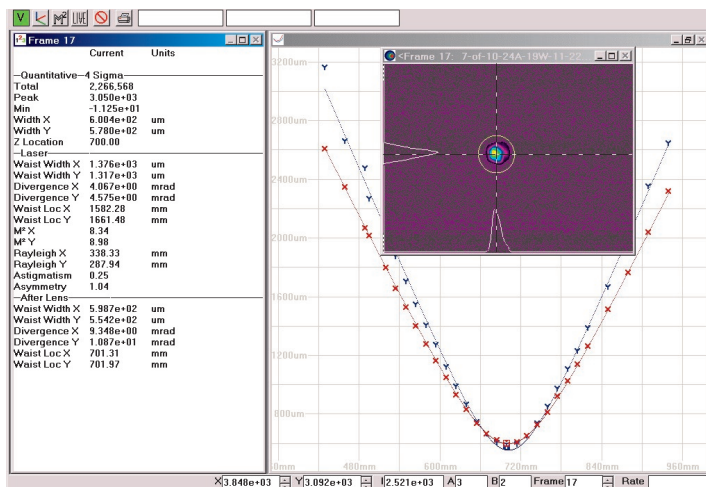

Lucia-30-M Output Beam Quality Measurement

